



The AP Range from SSP Pumps Limited has been designed with all product wetted parts manufactured from 316 type stainless steel to provide for duties where hygiene and/or anti corrosion operation is of prime concern. Construction is equally well suited to CIP procedures or quick and easy manual cleaning. AP Pumps are established as key elements of plant

in industries such as food and pharmaceutical processing, with proven performance on thousands of different products of low, medium or high viscosity. The gentle, low shear pumping action is of particular benefit where delicate products are involved and where soft solids such as whole fruits are included.

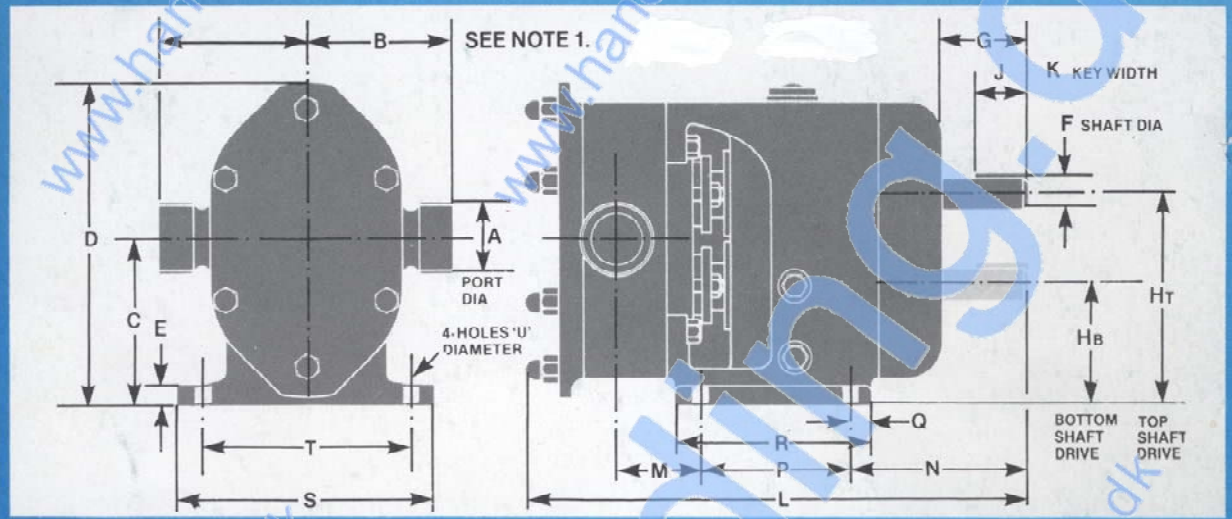

Pump Size	Dimension mm																			
	A	B	C	D	E	F	G	Hb	Ht	J	K	L	M	N	P	Q	R	S	T	U
AP100	25	88	100	196	13	20	50	72	127	32	6	297	51	100	99	15	120	154	128	11

PUMP SIZE	PORT SIZE		DISPLACEMENT		MAXIMUM DISCHARGE PRESSURE		MAXIMUM SPEED rpm
	in	mm	gal/100rev	ltr/100rev	lbf/in ²	bar	
AP100	1	25	2.8	12.8	150	10	1000

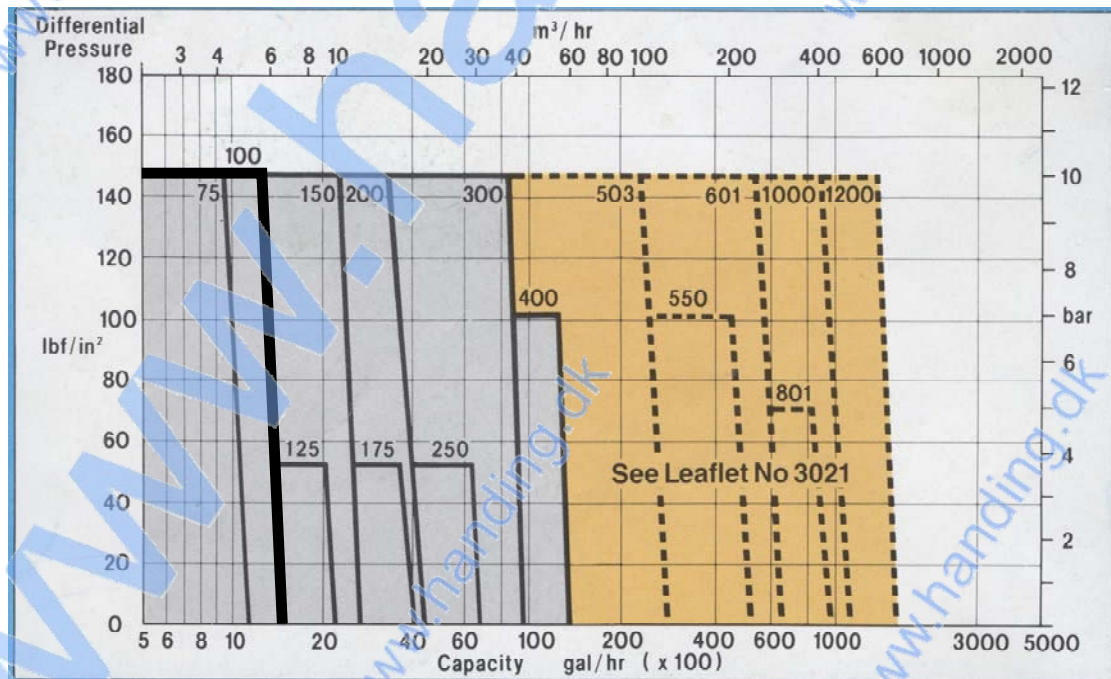

AP100	
Gearcase Oil Capacity (litre)	0.28
Approximate Weight Bare Shaft (kg)	20.0



Handing ApS
 Nordkranvej 5-9, Vassingerød
 DK - 3540 Lyngby
 Tel.: +45 48160166
 www.handing.dk

SSP Type 100 ND

Dette dokument er vejledende
 Der tages forbehold for fejl.
 This document is only guiding.
 We make reservation for possible errors

Alle mål i mm.
 Measures in mm

Lager nr.
PT1045