


2. Setup and function

The following illustration is a simplified representation of the setup of a checkweigher. Numerous variations of the design are possible due to the customized execution, e. g. the start/stop push-buttons for the transport belts and the main power switch can be in another location than shown below, depending on the weighframe type. Usually those weighframes for lightweight goods are equipped with their own infeed and outfeed conveyor. Some weighing terminal can be equipped with integrated ticket printers.

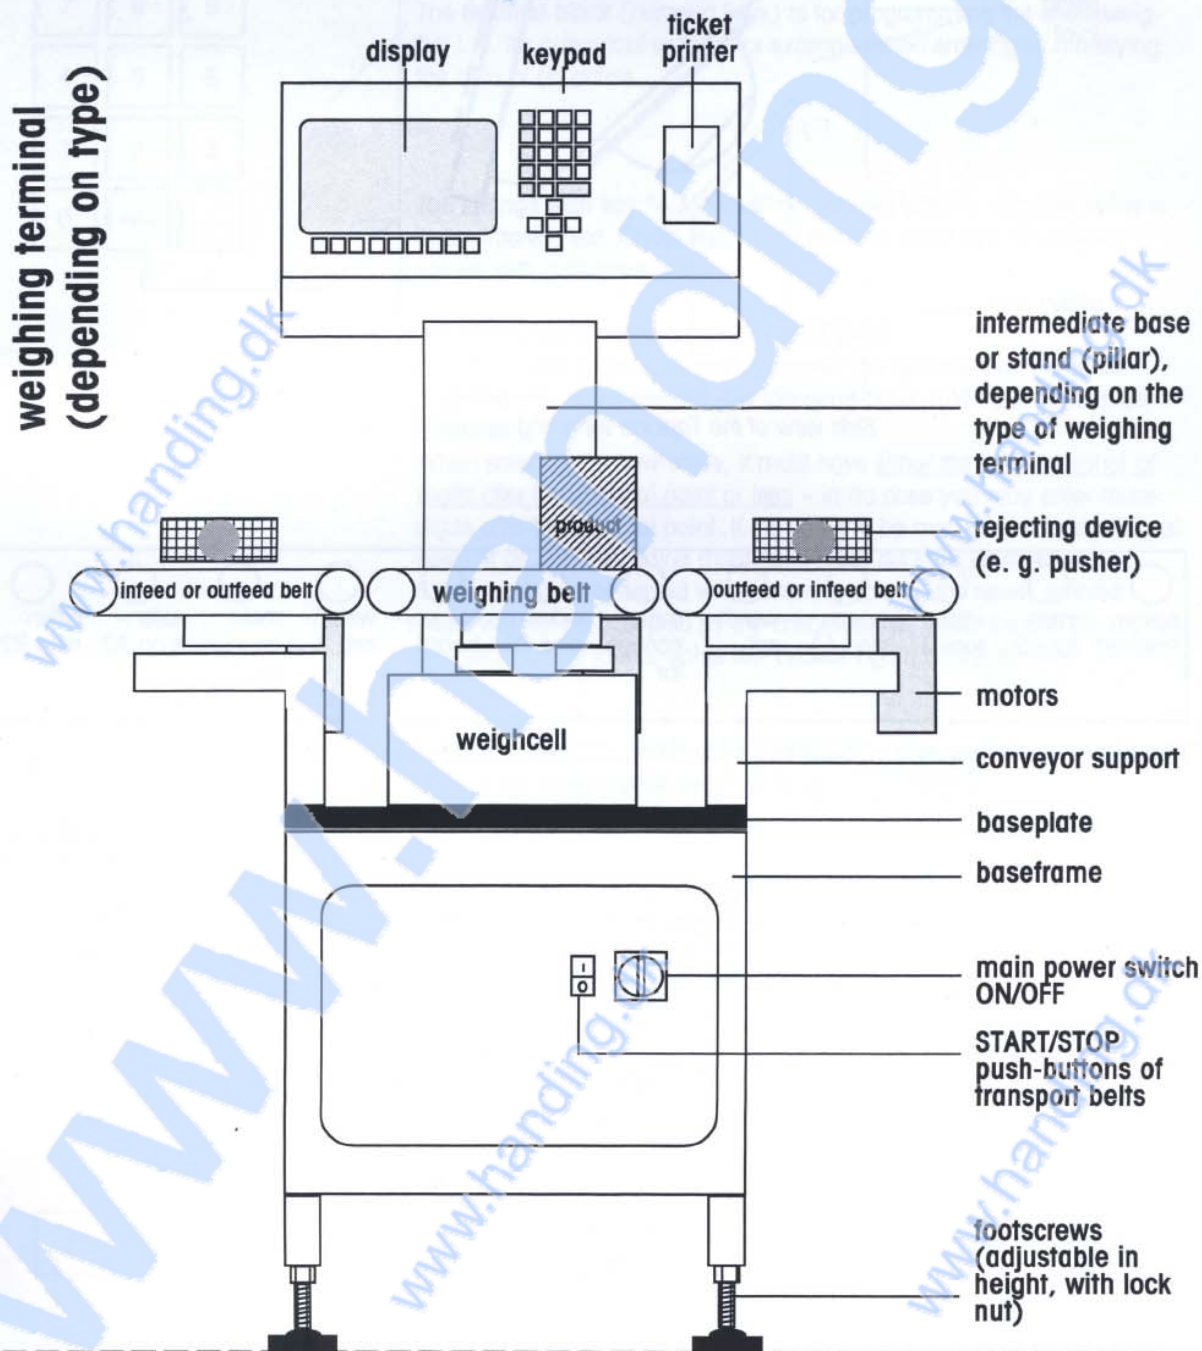

Handing ApS™
 Nordkranvej 5-9, Vassingerød
 DK - 3540 Lyngby
 Tel.: +45 48160166
 www.handing.dk

Checkvejer Mettler/Garvens type VS2

Dette dokument er vejledende.
 Der tages forbehold for fejl.
 This document is only guiding.
 We make reservation for possible errors.
 Copyright © By Handing ApS. All Rights Reserved.

Alle mål i mm.
 All measures in mm.

Lager nr. /NNJ

F930