


VWR INCU-Line IL 10

Product Specifications

Specifications	IL 10
Electrical	230V, 50/60 Hz, 0.3 A
Power consumption	70 W
Fuses	2 x 0.5 AT 250 V
Controls	PID control
Temperature range	Ambient +5 °C to +70 °C
Temperature resolution (display)	0.1 °C
Temperature accuracy at 37 °C	± 0.5 °C
Temperature fluctuation (time) at 37 °C	± 0.5 °C
Temperature variation (spatial) at 37 °C	± 0.5 °C
Environment temperature	+5 °C to +40 °C
Interior volume	10 l
Maximum load per shelf	3 kg
Maximum load per chamber	6 kg
Exterior dimensions W x D x H	285 x 280 x 335 mm
Interior dimensions W x D x H	230 x 220 x 200 mm
Weight	8.3 kg

Overview

Access port (Ø 7 mm) for external temperature probe

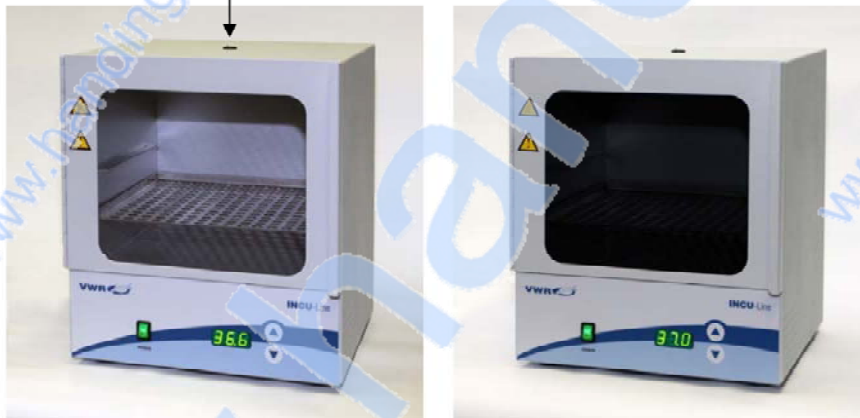

Description of front panel



POWER - power switch: For turning the incubator ON and OFF. It lights when incubator is switched ON.

▲ - UP key: For increasing the temperature.

▼ - DOWN key: For decreasing the temperature.

Display: For displaying the temperature (dot blinks when you set the temperature).



Handing ApS™
 Nordkranvej 5-9, Vassingerød
 DK - 3540 Lyngby
 Tel.: +45 48160166
www.handing.dk

Varmeskab Type VWR INCU-Line IL 10

Dette dokument er vejledende.
 Der tages forbehold for fejl.
 This document is only guiding.
 We make reservation for possible errors.

Copyright © By Handing ApS. All Rights Reserved.

Alle mål i mm.
 All measures in mm.

Lager nr. /LH

D2027