


# Alfa Laval


## Maximum Solid Size Capability

	Max. size of solids (mm)	
	Bilobe rotors	Trilobe rotors
SR4/055	16	11

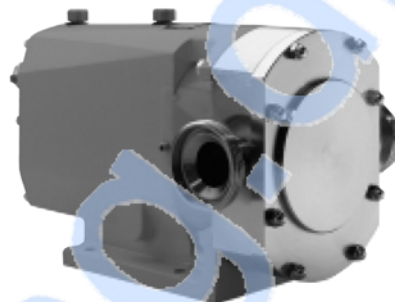

SR Series	Build Selection			SR Model	Displacement			Suction & Discharge Connections - Standard Port				Differential Pressure	Maximum Speed	
	Pump head code	Gearbox L - Horizontal Porting H - Vertical Porting	Shaft S - Stainless Steel D - Duplex Stainless Steel		Litres/rev	Imp gal/100 rev	US gal/100 rev	Nominal Bore Diameter (Standard)		Connection Size (International Standards)				
4	055	L or H	S	SR4/055/LS or HS	0.554	12.19	14.64	48	1.9	65	2.5	10	145	1000

Dimensions  
Horizontally ported

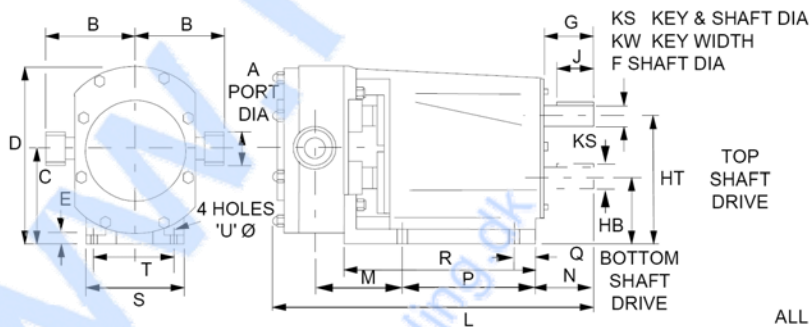

ALL DIMENSIONS IN MM

PUMP	A	B	C	D	E	F	G	HB	HT	J	KS	KW	L	M	N	P	Q	R	S	T	U
SR4/055/L	65	150	163	303	20	38	80	115	211	63	41.0	10	541	101	225	150	35	255	184	150	14



**Handing ApS™**  
Nordkranvej 5-9, Vassingerød  
DK - 3540 Lyngø  
Tel.: +45 48160166  
www.handing.dk

## Alfa Laval Type LKP-L 4055

Dette dokument er vejledende.  
Der tages forbehold for fejl.  
This document is only guiding.  
We make reservation for possible errors.  
Copyright © By Handing ApS. All Rights Reserved.

Alle mål i mm.  
All measures in mm.

Lager nr. /LH

**PT2051**